



TECHBRITE™

Saving energy in the best possible LIGHT

Wall Pack Lighting– LED




Applications

- Outdoor/ Indoor
- Suitable for Wet Locations
- Wall Mounted
- Area Lighting
- Parking/Dock Lighting
- General Lighting

Features


- Light Weight Cast Aluminum Cooling Fins
- High Efficiency LED Driver > 90%
- 50,000 hour rated life
- Beam angle 130°
- CRI > 83
- Operating temperature –22° to 176° F
- IP65 Rated
- 5000k
- Semi-Cutoff

Front View Dimensions

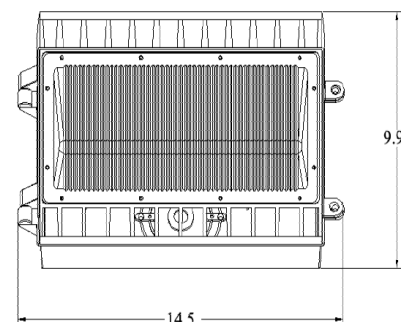

45 watt replaces 100-175 watt HID
 60 watt replaces 200-250 watt HID
 100 watt replaces 300-400 watt HID

TB-WP

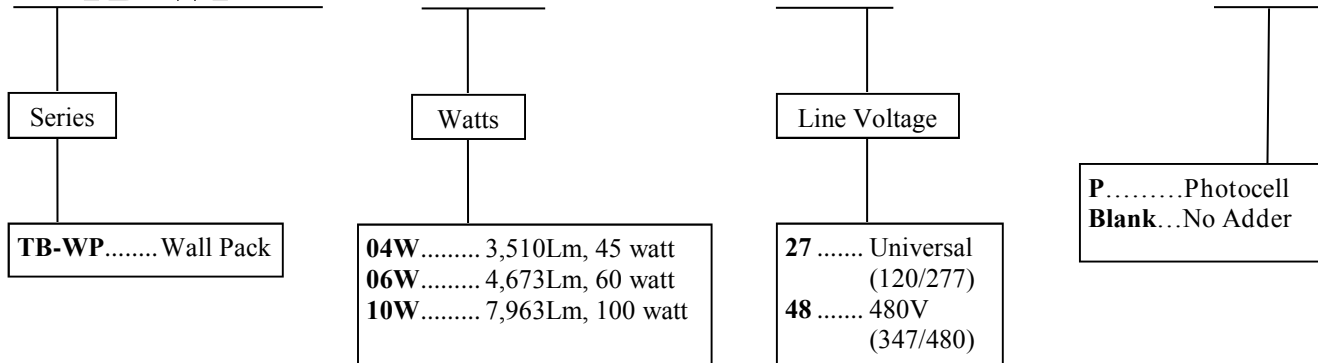

1000 Kieley Place., Cincinnati OH 45217

513-772-5070 office

513-252-0590 fax

www.techbrite.com

*Input wattage calculated using ballast manufacturer data in an open-air lamp application.

*Actual fixture wattage may vary based upon a variety of factors including: ballast factor; lamp wattage; input line voltage; ballast manufacturer; and/or environmental temperature.