

PROJECT NAME:

NOTES:

PART NUMBER:

DATE:

LED 2' CORRIDOR FIXTURE



PRODUCT DESCRIPTION:

TechBrite's LED Corridor Fixture blends multi-use with a sleek design. The LED Corridor Fixture is functional enough to be used for corridors, stairwells, and vanity applications, as well as a variety of ceiling or wall mounted retail and commercial applications. The integral occupancy sensor switches the lighting on/off or hi/low based on the facility requirements. The LED Corridor Fixture is built with post-painted steel adding to the style and visual appeal. The driver and LED chip combination generate over 130 LPW in the highly efficient lumen packages. The TechBrite LED Corridor Fixture is a versatile, affordable and valuable addition to the LED fixture offering.

FEATURES:

- Post-painted steel body
- Soft white, low glare diffuser
- Engineered diffuser to maximize LED performance
- Curved body to increase light output and efficiency
- LWP > 130*
- Integral sensor available
- 0 - 10v Dimming standard
- Limited warranty: 5 years on luminaire

PERFORMANCE SPECIFICATION:


Lumens	2064
Watts	18.41
LPW	117.3
Color	3115
CRI	83.1
L70	L70 @ > 210,000 hrs
L85	L85 @ > 165,000 hrs
Max Ambient Temp	140° F
Min Ambient Temp	-4° F
Dimming	0-10v Dimming to 1%
Driver Voltage	120/277
Chip	Samsung B+ S4
Driver	UNVLT - D700C30UNVTZ-C

* Actual performance data for SC25SS1B30B0000

* UL Verification Services Inc Test # 11944793.17

* In high efficiency configuration

DIMENSIONS:

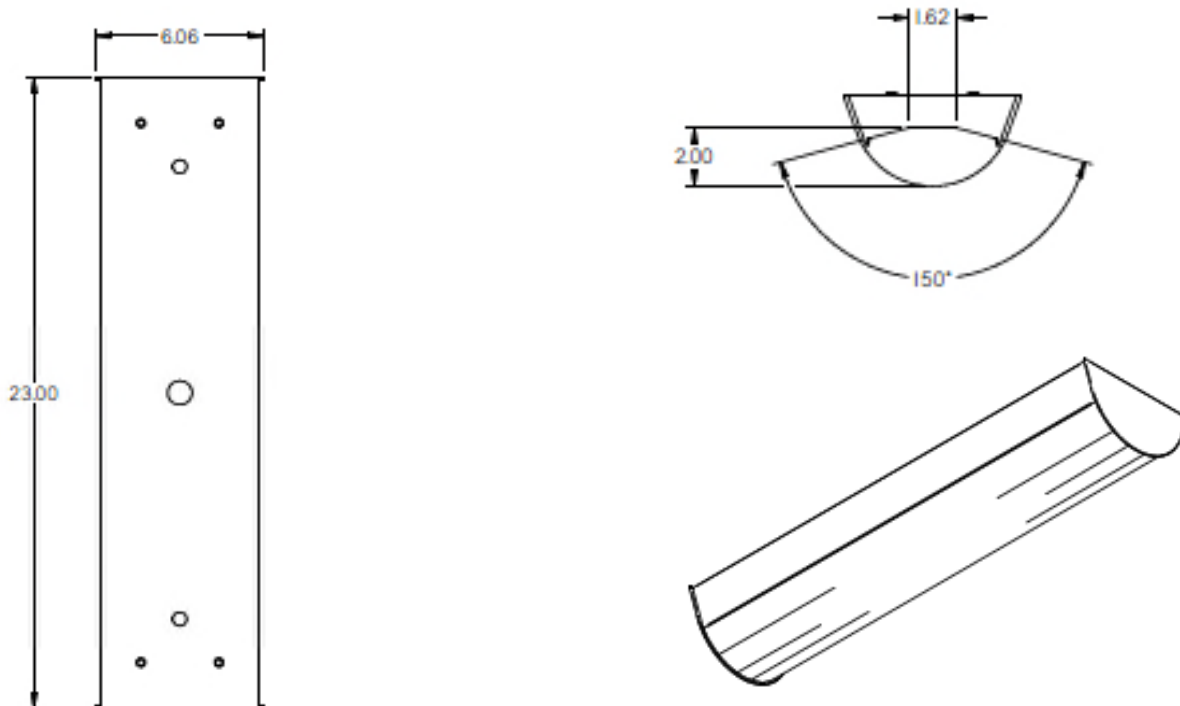

FREQUENTLY ORDERED PART NUMBERS:

Part Number	Lumens	Watts	LPW	Color	Description	Dimensions	Weight
SC25SS1B30B0000	2060	18	114	3000K	LED Corridor 2'	23.00 x 6.06 x 2.00 (inches)	5.00 (lbs)
SC25SS1B35B0000	2100	18	117	3500K	LED Corridor 2'	23.00 x 6.06 x 2.00 (inches)	5.00 (lbs)
SC25SS1B40B0000	2110	18	117	4000K	LED Corridor 2'	23.00 x 6.06 x 2.00 (inches)	5.00 (lbs)
SC25SS1B50B0000	2210	18	123	5000K	LED Corridor 2'	23.00 x 6.06 x 2.00 (inches)	5.00 (lbs)
SC25SS1B30C0000	3070	25	123	3000K	LED Corridor 2'	23.00 x 6.06 x 2.00 (inches)	5.00 (lbs)
SC25SS1B35C0000	3130	25	125	3500K	LED Corridor 2'	23.00 x 6.06 x 2.00 (inches)	5.00 (lbs)
SC25SS1B40C0000	3160	25	126	4000K	LED Corridor 2'	23.00 x 6.06 x 2.00 (inches)	5.00 (lbs)
SC25SS1B50C0000	3320	25	133	5000K	LED Corridor 2'	23.00 x 6.06 x 2.00 (inches)	5.00 (lbs)
SC25SS1B30D0000	3980	34	117	3000K	LED Corridor 2'	23.00 x 6.06 x 2.00 (inches)	5.00 (lbs)
SC25SS1B35D0000	4050	34	119	3500K	LED Corridor 2'	23.00 x 6.06 x 2.00 (inches)	5.00 (lbs)
SC25SS1B40D0000	4090	34	120	4000K	LED Corridor 2'	23.00 x 6.06 x 2.00 (inches)	5.00 (lbs)
SC25SS1B50D0000	4270	34	126	5000K	LED Corridor 2'	23.00 x 6.06 x 2.00 (inches)	5.00 (lbs)