

PROJECT NAME:

NOTES:

PART NUMBER:

DATE:

LED 4' CORRIDOR FIXTURE



PRODUCT DESCRIPTION:

TechBrite's LED Corridor Fixture blends multi-use with a sleek design. The LED Corridor Fixture functions well in corridors, stairwells, and vanity applications, as well as a variety of ceiling or wall mounted retail and commercial applications. The integral occupancy sensor switches the lighting on/off or hi/low based on the facility requirements. The LED Corridor Fixture is built with post-painted steel adding to the style and visual appeal. The driver and LED chip combination generate LPW over 130 LPW in the highly efficient lumen packages. The TechBrite LED Corridor Fixture is a versatile, affordable and valuable addition to the LED fixture offering.

FEATURES:


- Post-painted steel body
- Soft white, low glare diffuser
- Engineered diffuser to maximize LED performance
- Curved body to increase light output and efficiency
- LPW > 130*
- Integral sensor available
- 0-10v Dimming standard
- Limited warranty: 5 years on luminaire

PERFORMANCE SPECIFICATION:

Lumens	3204
Watts	25.23
LPW	130.2
Color	3120
CRI	83.4
L70	L70 @ > 200,000 hrs
L85	L85 @ > 150,000 hrs
Max Ambient Temp	140° F
Min Ambient Temp	-4° F
Dimming	0-10v Dimming to 1%
Driver Voltage	120/277
Chip	Samsung B+ S4
Driver	UNVLT - DI0CC55UNVTZ-C

- * Actual performance data for SC45SS1B30B0000
- * UL Verification Services Inc Test # 11944793.08
- * In high efficiency configuration

DIMENSIONS:

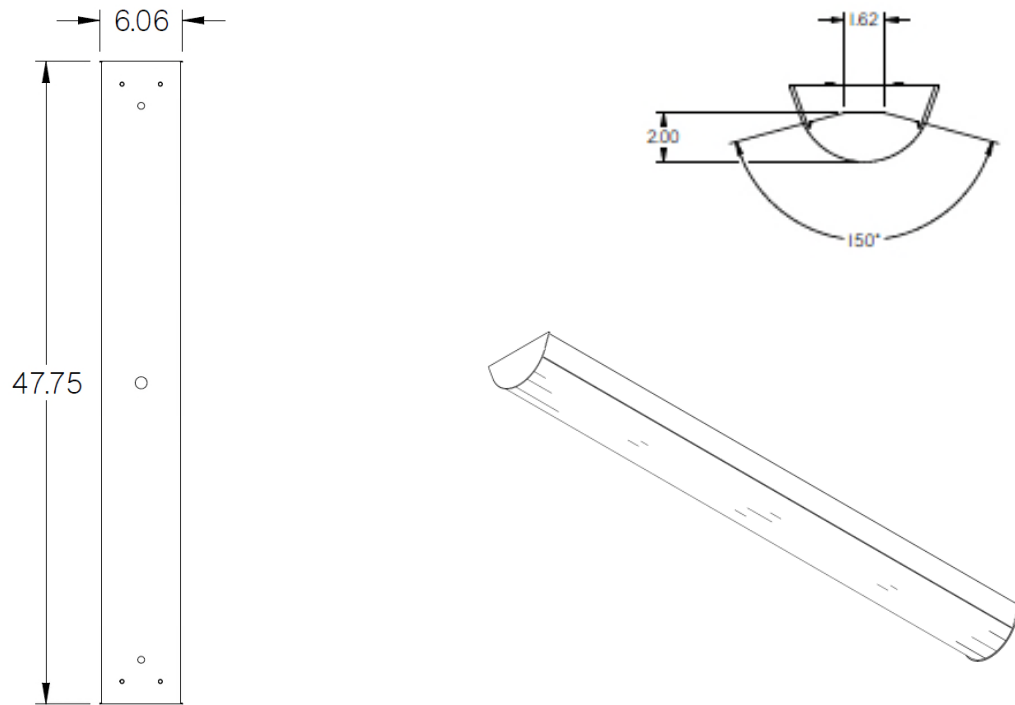

FREQUENTLY ORDERED PART NUMBERS:

Part Number	Lumens	Watts	LPW	Color	Description	Dimensions	Weight
SC45SS1B30A0000	2190	17	129	3000K	LED Corridor 4'	47.75 x 6.06 x 3.40 (inches)	8.00 (lbs)
SC45SS1B35A0000	2250	17	132	3500K	LED Corridor 4'	47.75 x 6.06 x 3.40 (inches)	8.00 (lbs)
SC45SS1B40A0000	2280	17	134	4000K	LED Corridor 4'	47.75 x 6.06 x 3.40 (inches)	8.00 (lbs)
SC45SS1B50A0000	2330	17	137	5000K	LED Corridor 4'	47.75 x 6.06 x 3.40 (inches)	8.00 (lbs)
SC45SS1B30B0000	3200	25	128	3000K	LED Corridor 4'	47.75 x 6.06 x 3.40 (inches)	8.00 (lbs)
SC45SS1B35B0000	3290	25	132	3500K	LED Corridor 4'	47.75 x 6.06 x 3.40 (inches)	8.00 (lbs)
SC45SS1B40B0000	3340	25	134	4000K	LED Corridor 4'	47.75 x 6.06 x 3.40 (inches)	8.00 (lbs)
SC45SS1B50B0000	3370	25	135	5000K	LED Corridor 4'	47.75 x 6.06 x 3.40 (inches)	8.00 (lbs)
SC45SS1B30C0000	4120	34	121	3000K	LED Corridor 4'	47.75 x 6.06 x 3.40 (inches)	8.00 (lbs)
SC45SS1B35C0000	4240	34	125	3500K	LED Corridor 4'	47.75 x 6.06 x 3.40 (inches)	8.00 (lbs)
SC45SS1B40C0000	4270	34	126	4000K	LED Corridor 4'	47.75 x 6.06 x 3.40 (inches)	8.00 (lbs)
SC45SS1B50C0000	4430	34	130	5000K	LED Corridor 4'	47.75 x 6.06 x 3.40 (inches)	8.00 (lbs)
SC45SS1B30D0000	5750	49	117	3000K	LED Corridor 4'	47.75 x 6.06 x 3.40 (inches)	8.00 (lbs)
SC45SS1B35D0000	5920	49	121	3500K	LED Corridor 4'	47.75 x 6.06 x 3.40 (inches)	8.00 (lbs)
SC45SS1B40D0000	6010	49	123	4000K	LED Corridor 4'	47.75 x 6.06 x 3.40 (inches)	8.00 (lbs)
SC45SS1B50D0000	6410	49	131	5000K	LED Corridor 4'	47.75 x 6.06 x 3.40 (inches)	8.00 (lbs)