




LED HIGH BAY RETRO

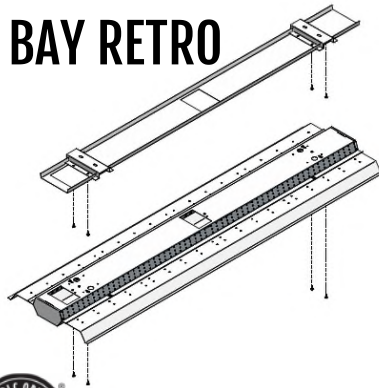

PRODUCT DESCRIPTION:

TechBrite's LED High Bay Retro provides a viable alternative to replacing existing linear fluorescent high bays. The LED High Bay Retro is popular in applications where existing fixtures are "piped" or hard-wired to the power source. The LED High Bay Retro is the "Plug and Play" answer for difficult-to-replace fixtures while offering maximum controllability.

FEATURES:

- Retro kit installs in existing fluorescent fixture housing
- Reuse existing metal housing
- Fits fixtures 12.5" and wider
- 0-10v Dimming standard
- DLC Premium—Classified as retro kit and new fixture
- Limited warranty: 5 years on luminaire

APPLICATIONS:

- Retrofit Existing Fluorescent High Bays
- Warehouses
- Storage Facilities
- Manufacturing
- Gymnasiums
- Task Lighting
- Retrofit Fixtures "Piped"

ORDER GUIDE:

| Series | | Length | | Width | | # of Boards | | Type | | Line Voltage | | Reflector | | Color Temp | | Lumens/Watts | | Options |
|--------|----------------|--------|--------|-------|------|-------------|----------|------|-----|--------------|---------------------|-----------|----------------------|------------|-------|--------------|-------------|---|
| RB | High Bay Retro | 4 | 4 Foot | 12 | 12"+ | 6 | 6 Boards | SS | LED | 1 | Universal (120/277) | B | Ballast/Driver Cover | 5 | 5000K | 5000K | | 0000 Please see Accessories Guide link |
| | | | | | | | | | | | | | | 4 | 4000K | A | 10990/ 72w | |
| | | | | | | | | | | | | | | 3* | 3500K | B | 13850/ 92w | |
| | | | | | | | | | | | | | | | | C | 17600/ 127w | |
| | | | | | | | | | | | | | | | | D* | 19780/ 147w | |
| | | | | | | | | | | | | | | | | E | 24470/ 173w | |
| | | | | | | | | | | | | | | | | F | 25460/ 182w | |