

| | PROJECT NAME: |
|--|---------------|
| | NOTES: |
| | PART NUMBER: |
| | DATE: |

LED SOTA FIXTURE—8'



PRODUCT DESCRIPTION:

The SOTA LED Fixture is the quick, easy, and economical way to modernize any commercial and industrial space. Building upon the Strip Fixture platform, the SOTA LED Fixture is constructed with quality pre-painted steel designed to withstand tough environments. TechBrite's SOTA LED Fixture blends high LPW—as much as 135 LPW—with an economical design. The SOTA LED Fixture is easily customizable with sensors, wireless controls, cords, hanging kits—just to mention a few. New construction or retrofitting an existing space, TechBrite's SOTA LED Fixture is the perfect solution.

FEATURES:

- Up to 138 LPW*
- Wireless control ready
- 4 Foot and 8 foot (See 4 foot spec sheet for details)
- Surface or suspended mount
- Continuous row mounting available
- 0-10v Dimming standard
- Limited warranty: 5 years on luminaire

PERFORMANCE SPECIFICATION:

| Lumens | 6650 | | | |
|------------------|------------------------|--|--|--|
| Watts | 56.0 | | | |
| LPW | 122.7 | | | |
| Color | 3000 | | | |
| CRI | 83.8 | | | |
| L70 | L70 @ > 200,000 | | | |
| L85 | L85 @ > 110,000 | | | |
| Max Ambient Temp | 143° F | | | |
| Min Ambient Temp | -4° F | | | |
| Dimming | 0-10v Dimming to 1% | | | |
| Driver Voltage | 120/277 | | | |
| Chip | Samsung B+ S4 | | | |
| Driver | UNVLT - D15CC55UNVTZ-C | | | |


- * Actual Performance Data for SL84SS1B30CL0XX
- * UL Verification Services Test # 12223046.15
- * In high efficiency configuration





SOTA LED FIXTURE-8'

Commercial/Industrial

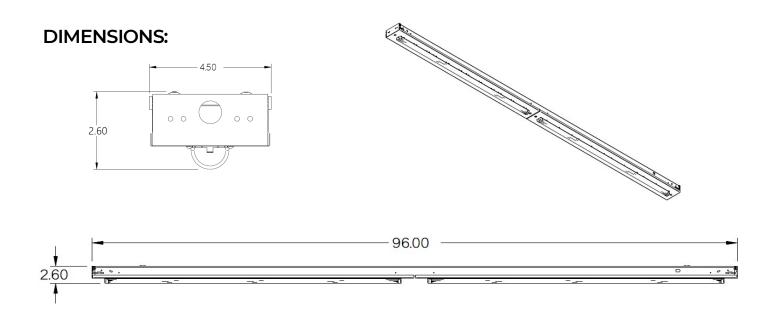

FREQUENTLY ORDERED PART NUMBERS:

| Part Number | Lumens | Watts | LPW | Color | Description | Dimensions | Weight | DLC |
|-----------------|--------|-------|-----|-------|----------------------|------------------------------|-------------|----------|
| SL84SS1B30AL000 | 3450 | 28 | 123 | 3000K | LED SOTA Fixture 8ft | 96.00 x 4.50 x 2.60 (inches) | 13.40 (lbs) | Premium |
| SL84SS1B40AL000 | 3770 | 28 | 135 | 4000K | LED SOTA Fixture 8ft | 96.00 x 4.50 x 2.60 (inches) | 13.40 (lbs) | Premium |
| SL84SS1B50AL000 | 3830 | 28 | 137 | 5000K | LED SOTA Fixture 8ft | 96.00 x 4.50 x 2.60 (inches) | 13.40 (lbs) | Premium |
| | | | | | | | | |
| SL84SS1B30BL000 | 5110 | 41 | 125 | 3000K | LED SOTA Fixture 8ft | 96.00 x 4.50 x 2.60 (inches) | 13.40 (lbs) | Standard |
| SL84SS1B40BL000 | 5570 | 41 | 136 | 4000K | LED SOTA Fixture 8ft | 96.00 x 4.50 x 2.60 (inches) | 13.40 (lbs) | Premium |
| SL84SS1B50BL000 | 5670 | 41 | 138 | 5000K | LED SOTA Fixture 8ft | 96.00 x 4.50 x 2.60 (inches) | 13.40 (lbs) | Premium |
| | | | | | 1 | | | |
| SL84SS1B30CL000 | 6650 | 56 | 119 | 3000K | LED SOTA Fixture 8ft | 96.00 x 4.50 x 2.60 (inches) | 13.40 (lbs) | Standard |
| SL84SS1B40CL000 | 7250 | 56 | 129 | 4000K | LED SOTA Fixture 8ft | 96.00 x 4.50 x 2.60 (inches) | 13.40 (lbs) | Premium |
| SL84SS1B50CL000 | 7380 | 56 | 132 | 5000K | LED SOTA Fixture 8ft | 96.00 x 4.50 x 2.60 (inches) | 13.40 (lbs) | Premium |
| | | | | | | | | |
| SL84SS1B30DL000 | 8280 | 72 | 101 | 3000K | LED SOTA Fixture 8ft | 96.00 x 4.50 x 2.60 (inches) | 13.40 (lbs) | Standard |
| SL84SS1B40DL000 | 9020 | 72 | 110 | 4000K | LED SOTA Fixture 8ft | 96.00 x 4.50 x 2.60 (inches) | 13.40 (lbs) | Standard |
| SL84SS1B50DL000 | 9180 | 72 | 112 | 5000K | LED SOTA Fixture 8ft | 96.00 x 4.50 x 2.60 (inches) | 13.40 (lbs) | Premium |
| | | | | | | | | |
| SL84SS1B30EL000 | 10120 | 92 | 110 | 3000K | LED SOTA Fixture 8ft | 96.00 x 4.50 x 2.60 (inches) | 13.40 (lbs) | Standard |
| SL84SS1B40EL000 | 11020 | 92 | 120 | 4000K | LED SOTA Fixture 8ft | 96.00 x 4.50 x 2.60 (inches) | 13.40 (lbs) | Standard |
| SL84SS1B50EL000 | 11220 | 92 | 122 | 5000K | LED SOTA Fixture 8ft | 96.00 x 4.50 x 2.60 (inches) | 13.40 (lbs) | Standard |

