

PROJECT NAME:
NOTES:
PART NUMBER:
DATE:

LED STRIP—SELECTABLE



PRODUCT DESCRIPTION:

The LED Strip Selectable Fixture is the workhorse for commercial and industrial applications. The TechBrite LED Strip Selectable Fixture combines the latest LED technology, generating as much as 152 LPW in the high efficiency model. Remove your old, inefficient fluorescent lighting, saving as much as 60% in energy, while improving light levels and lowering maintenance costs. TechBrite's LED Strip Selectable Fixture is easy to install and compact, making it an ideal solution for dozens of applications. The LED Strip Selectable Fixture is available in lumen packages from 3,600 to 10,100 lumens, making it the perfect solution for any environment.

FEATURES:


- Field Selectable CCT and Wattage
- New Construction or Retrofit Applications
- 1.0kV Input Surge
- Available in 4' and 8'
- Up to 152 LPW
- 0-10v Dimming Standard
- Limited Warranty: 5 Years on Luminaire

ORDERING CHART:

Series		Length		Nominal Lumen Output		Select		Optional Occupancy Sensor		Optional Emergency Drivers		Controls	
SL	LED Strip	4FT	4 foot	5L	5,000 lm (4 FT)	LKFS	34/ 30/ 25 W 5000/ 4000/ 3500K (4 FT)	OS	Passive Infrared	EM5	5W Emergency Driver	BT	Bluetooth Control
		8FT	8 foot	10L	10,000 lm (8 FT)	LKFS	68/ 60/ 55 W 5000/ 4000/ 3500K (8 FT)	ODS	Microwave	EM10	10W Emergency Driver	OBD	On Board Dimmer
								Blank	No Occupancy Sensor	EM13	13W Emergency Driver	Blank	No Control/Dimmer
										Blank	No Emergency Driver		

SAMPLE PART NUMBER: SL-4FT-5L-LKFS-EM5

DIMENSIONS:

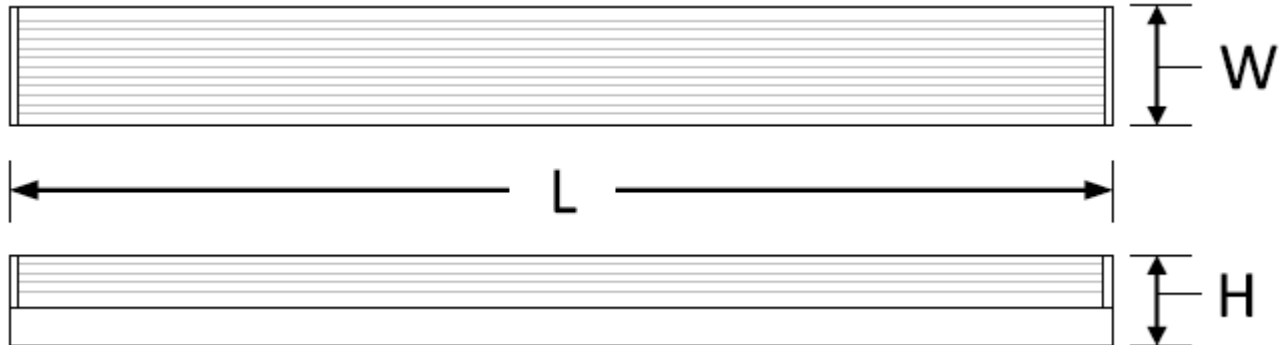

	SL-4FT-LKFS	SL-8FT-LKFS
L	47.3"	94.2"
W	3.3"	3.3"
H	3.5"	3.5"
Weight (lbs)	4.5	9

FREQUENTLY ORDERED PART NUMBERS:

Part Number	Nominal Lumens	Watts	LPW	Color	Description	Dimensions	Weight
SL-4FT-5L-LKFS	5,000	26-35	139-144	3500/ 4000/ 5000K	4' Strip CCT & Wattage Selectable	47.3 x 3.3 x 3.5 (in)	4.5 (lbs)
SL-8FT-10L-LKFS	10,000	55-70	133-144	3500/ 4000/ 5000K	8' Strip CCT & Wattage Selectable	94.2 x 3.3 x 3.5 (in)	9 (lbs)

ELECTRICAL DATA:

SL-4FT-LKFS	Low Lumens			Mid Lumens			High Lumens		
	3500K	4000K	5000K	3500K	4000K	5000K	3500K	4000K	5000K
Lumens	3,690	3,631	3,722	4,336	4,317	4,389	4,876	5,203	4,903
Watts	26	25	26	31	30	31	35	34	35
Efficacy	143	143	144	140	143	142	138	152	139
Input Current (A)	120V = 0.22A	120V = 0.21A	120V = 0.22A	120V = 0.26A	120V = 0.25A	120V = 0.26A	120V = 0.29A	120V = 0.28A	120V = 0.29A
	240V = 0.11A	240V = 0.10A	240V = 0.11A	240V = 0.13A	240V = 0.13A	240V = 0.13A	240V = 0.15A	240V = 0.14A	240V = 0.15A
	277V = 0.09A	277V = 0.09A	277V = 0.09A	277V = 0.11A	277V = 0.11A	277V = 0.11A	277V = 0.13A	277V = 0.12A	277V = 0.13A

SL-8FT-LKFS	Low Lumens			Mid Lumens			High Lumens		
	3500K	4000K	5000K	3500K	4000K	5000K	3500K	4000K	5000K
Lumens	7,251	7,135	7,314	8,520	8,483	8,624	9,553	10,124	9,619
Watts	55	55	55	60	60	60	70	68	70
Efficacy	132	130	133	142	141	144	136	149	137
Input Current (A)	120V = 0.46A	120V = 0.46A	120V = 0.46A	120V = 0.50A	120V = 0.50A	120V = 0.50A	120V = 0.58A	120V = 0.57A	120V = 0.58A
	240V = 0.23A	240V = 0.23A	240V = 0.23A	240V = 0.25A	240V = 0.25A	240V = 0.25A	240V = 0.29A	240V = 0.28A	240V = 0.29A
	277V = 0.20A	277V = 0.20A	277V = 0.20A	277V = 0.22A	277V = 0.22A	277V = 0.22A	277V = 0.25A	277V = 0.25A	277V = 0.25A