

|               |
|---------------|
| PROJECT NAME: |
| NOTES:        |
| PART NUMBER:  |
| DATE:         |

## LED ADJUSTABLE WALL PACK—SELECTABLE



### PRODUCT DESCRIPTION:

Improve your outdoor lighting environment and energy efficiency by 60% or more with TechBrite's LED Adjustable Wall Pack. Designed with the contractor in mind, the TechBrite LED Adjustable Wall Pack is lightweight, and contains well positioned mounting holes and convenient knockouts. The LED Adjustable Wall Pack features a specially engineered lens to improve light utilization and provide an even distribution. The TechBrite LED Adjustable Wall Pack features up to 154 LPW. Indoor or outdoor, the TechBrite LED Adjustable Wall Pack is an important component to maximize energy, reduce maintenance, improve safety, and improve existing light levels.

### FEATURES:

- Field Selectable CCT & Wattage
- Limited Warranty: 5 Years on Luminaire
- Adjustable Housing—Up to 90°
- 4kV Input Surge
- Dark Bronze

### PERFORMANCE SPECIFICATION:

|                  |                     |
|------------------|---------------------|
| Lumens           | 3000/ 4000/ 5000K   |
| Watts            | 34/ 25/ 20          |
| LPW              | 151/ 151/ 154       |
| CRI              | > 80                |
| L70              | L70 @ > 146,000 hrs |
| L90              | L90 @ > 44,000 hrs  |
| Max Ambient Temp | 122° F              |
| Min Ambient Temp | -40° F              |
| Dimming          | 0-10v Dimming       |
| Input Surge      | 4kV                 |
| Power Factor     | > 0.90              |


\* Actual performance data for WPA-5L-LKFS

### ORDERING CHART:

| Series |                      | Nominal Lumen Output |           | Select |                                   |
|--------|----------------------|----------------------|-----------|--------|-----------------------------------|
| WPA    | Selectable Wall Pack | 5L                   | 5,000 lm  | LKFS   | 34/ 25/ 20 W<br>5000/ 4000/ 3000K |
|        |                      | 10L                  | 10,000 lm |        | 71/ 59/ 45 W<br>5000/ 4000/ 3000K |

SAMPLE PART NUMBER: WPA-10L-LKFS

## DIMENSIONS:

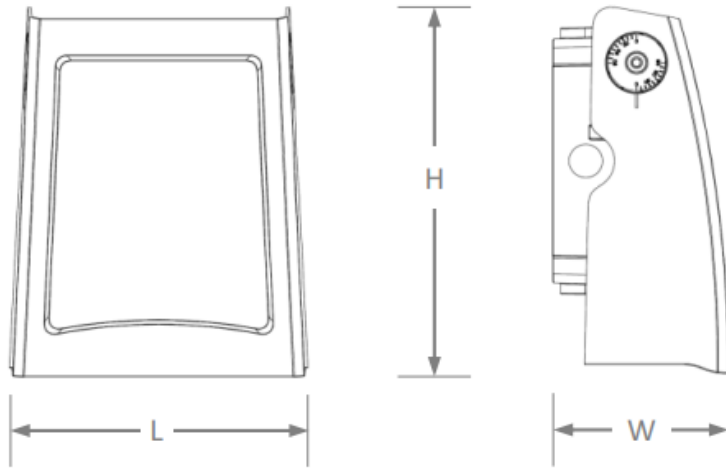

|                      | <u>5L</u> | <u>10L</u> |
|----------------------|-----------|------------|
| <b>Length- L</b>     | 6.5"      | 8.5"       |
| <b>Width - W</b>     | 4"        | 5"         |
| <b>Height - H</b>    | 8"        | 11"        |
| <b>Weight (lbs.)</b> | 3         | 5          |

## ELECTRICAL DATA:

|                          | WPA-5L-LKFS  |              |              |              |              |              |              |              |              |
|--------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
|                          | Low Lumens   |              |              | Mid Lumens   |              |              | High Lumens  |              |              |
|                          | 3000K        | 4000K        | 5000K        | 3000K        | 4000K        | 5000K        | 3000K        | 4000K        | 5000K        |
| <b>Lumens</b>            | 3,044        | 3,002        | 3,307        | 3,819        | 3,842        | 4,155        | 4,646        | 5,084        | 5,049        |
| <b>Watts</b>             | 22           | 20           | 22           | 28           | 25           | 28           | 35           | 34           | 35           |
| <b>Efficacy</b>          | 142          | 154          | 154          | 137          | 151          | 149          | 133          | 151          | 145          |
| <b>Input Current (A)</b> | 120V = 0.18A | 120V = 0.17A | 120V = 0.18A | 120V = 0.23A | 120V = 0.21A | 120V = 0.23A | 120V = 0.29A | 120V = 0.28A | 120V = 0.29A |
|                          | 240V = 0.09A | 240V = 0.08A | 240V = 0.09A | 240V = 0.12A | 240V = 0.10A | 240V = 0.12A | 240V = 0.15A | 240V = 0.14A | 240V = 0.15A |
|                          | 277V = 0.08A | 277V = 0.07A | 277V = 0.08A | 277V = 0.10A | 277V = 0.09A | 277V = 0.10A | 277V = 0.13A | 277V = 0.12A | 277V = 0.13A |

|                          | WPA-10L-LKFS |              |              |              |              |              |              |              |              |
|--------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
|                          | Low Lumens   |              |              | Mid Lumens   |              |              | High Lumens  |              |              |
|                          | 3000K        | 4000K        | 5000K        | 3000K        | 4000K        | 5000K        | 3000K        | 4000K        | 5000K        |
| <b>Lumens</b>            | 6,536        | 7,028        | 7,107        | 8,339        | 9,032        | 9,056        | 9,746        | 10,734       | 10,578       |
| <b>Watts</b>             | 46           | 45           | 46           | 61           | 59           | 61           | 74           | 71           | 74           |
| <b>Efficacy</b>          | 142          | 157          | 154          | 137          | 153          | 148          | 132          | 150          | 142          |
| <b>Input Current (A)</b> | 120V = 0.38A | 120V = 0.38A | 120V = 0.38A | 120V = 0.51A | 120V = 0.49A | 120V = 0.51A | 120V = 0.62A | 120V = 0.59A | 120V = 0.62A |
|                          | 240V = 0.19A | 240V = 0.19A | 240V = 0.19A | 240V = 0.25A | 240V = 0.25A | 240V = 0.25A | 240V = 0.31A | 240V = 0.30A | 240V = 0.31A |
|                          | 277V = 0.17A | 277V = 0.16A | 277V = 0.17A | 277V = 0.22A | 277V = 0.21A | 277V = 0.22A | 277V = 0.27A | 277V = 0.26A | 277V = 0.27A |